




TECHNICAL SPECIFICATION SHEET

PRODUCT NAME: 1500mmSlinky

PRODUCT CODE: WM3/1500

Doc Rev 1. 21.10.2015. CF

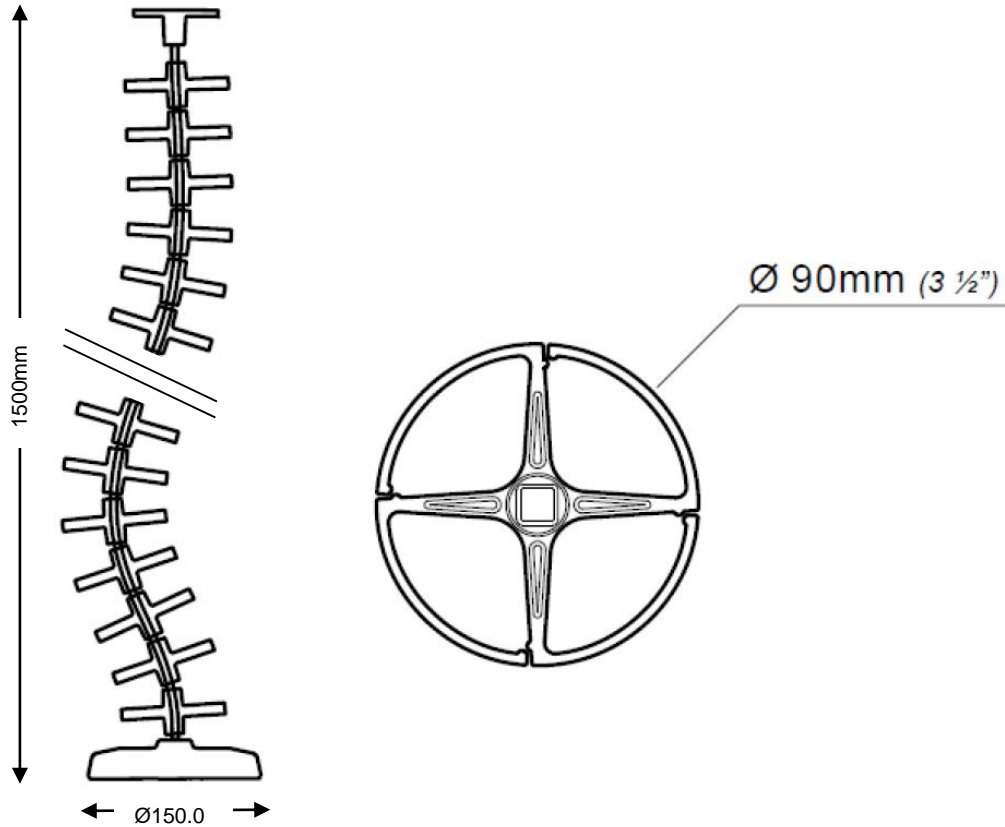

*Note that dimensions provided are measured in mm

KEY FEATURES

- Four compartment spine for efficient segregation of cables
- Large capacity will comfortably hold 20mm (3/4") diameter flexible conduit
- Easy cable insertion and removal
- Manufactured in robust, break resistant polycarbonate

Product Classification	Accessories
Max load	N/A
Build level	N/A
Recycled content	14%
Total product recyclable	100%

LOGISTICAL

Box contains	Slinky, desk fixing plate, screws & base
Product net weight:	1.74kg
Box dims (HxWxD)	111 x 327 x 518 mm
Box gross weight	2.4 kg
Carton quantity	1
Master dims (HxWxD)	111 x 327 x 518 mm
Master weight	2.4 kg
Country of origin	UK
Country of configuration	UK

ORDERING INFORMATION

<u>Colour</u>	<u>Product code</u>	<u>EAN</u>
Translucent	WM3/1500/T (Made to order)	N/A
Black	WM3/1500/B (Made to order)	N/A

WARRANTY

Warranty Term	Limited lifetime
----------------------	------------------

COMPLIANCE & SAFETY CERTIFICATION

Whilst no mandatory standards apply to this product sector, this product have been designed to conform to the requirements of BS EN ISO 12100 : 2003 – Principles for safe design of Machinery Part 1, Part 2

Conformance certification	N/A
Test authority	CBS
Safety certification	N/A

ENVIRONMENTAL

Material type	Material type Weight	% PIR of total weight	% PCR of total weight	% of total product recyclable
Aluminium Die Cast	0g	0%	0%	0%
Aluminium Extruded	0g	0%	0%	0%
Plastic	935.58g	2.69%	2.69%	53.75%
Rubber	0g	0%	0%	0%
Steel	805g	0%	11.56%	46.25%
Other	0g	0%	0%	0%
Total	1740.58	2.69%	14.25%	100.00%

CLEANING, STORAGE & MAINTENANCE

Routine servicing	Periodic inspection
Service components	Available to order
Cleaning & Maintenance	Damp cloth, no abrasives, no solvents to be used on the cosmetic surfaces
Handling & Storage	Do not drop or expose to moisture

Colebrook Bosson Saunders (Products) Ltd accept no liability for the accuracy of the information contained herein and retain the right to modify the specifications or data contained herein without prior notification.